



Inline housing with sight glass and blind flange



Inline housing with measuring sensor



Inline housing with LED sight glass illumination


Finally, Kieselmann offers the following components:

- ▶ **Sight glass / blind flange**
- ▶ **LED sight glass illumination**
  - with hygienic design energy-saving technology and an illuminant service life of approx. 20.000 hours
- ▶ **Measuring sensor**

Further measuring and control components on request.

## Inline housing for measuring and control systems

The Kieselmann inline system is extremely versatile. It is fully compatible with the common inline systems and accessory components. The optimised housing form offers universal connection possibilities and can thus be safely cleaned according to CIP/SIP. Together with Kieselmann *k-flex* sealing elements, also the maintenance time can be extended noticeably.

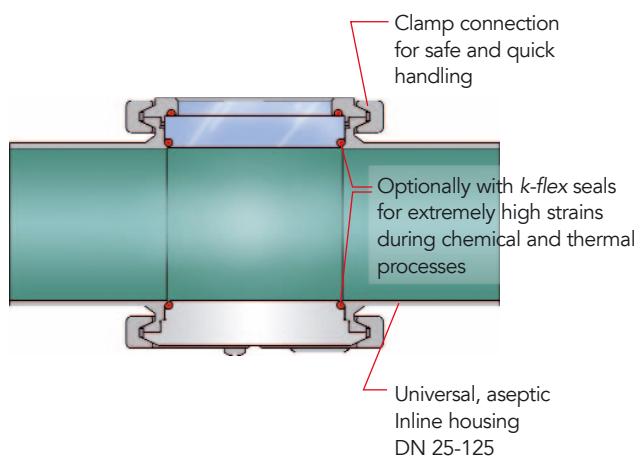

### TECHNICAL DATA

**Nominal widths for pipe connections:**

- DN 25 – DN 125
- Welding connection for pipe
- DIN 11850 Reihe 2
- DIN 11866 Reihe A
- Further pipe connections optionally

**Material:** 1.4404/AISI 316L

**Sealings:** EPDM (SIP 140°C, 1h) FDA  
*k-flex* (SIP 140°C, 1h) FDA

**Apparatus connections:** with clamp connection

**Surface**

**Product touched:** Ra ≤ 0,8 mm, e-polished